How to Install the Flow Switch

⚠**WARNING** - **ALWAYS MAKE SURE THE INPUT POWER IS COMPLETELY DISCONNECTED BEFORE ATTEMPTING ANY TROUBLESHOOTING PROCEDURES. ALL TROUBLESHOOTING SHOULD BE DONE BY A QUALIFIED PROFESSIONAL.**

Installation Steps for installing a Flow Switch into existing equipment:

1. Disconnect the flow switch wire from the Si control box.

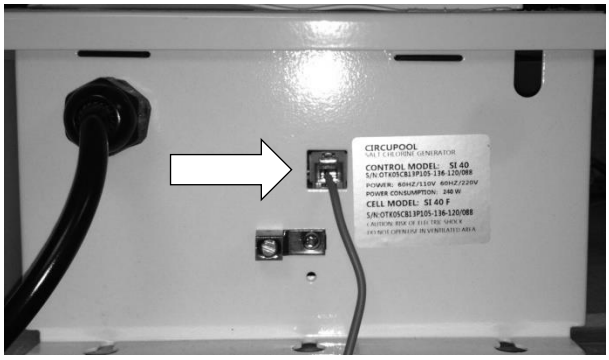

2. Turn the top of the Flow Switch counter clockwise until the switch is loose enough to pull out of the PVC fitting.

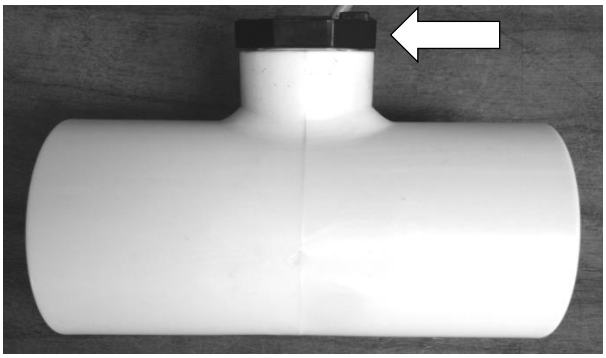
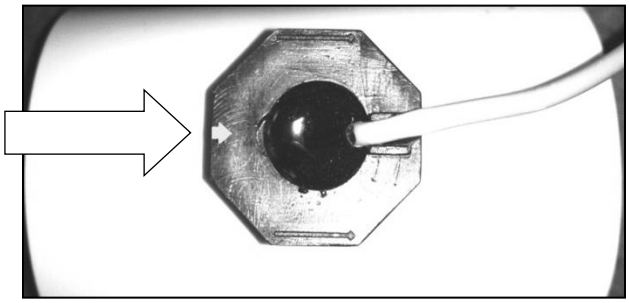
3. Install new flow switch and twist it clockwise to tighten. Make sure the directional arrow is facing the same direction as the water flow. Additional Teflon tape can be added to the threads to ensure a tight water seal.